


STATIONARY CONCRETE PUMP SPECIFICATIONS



Item	Model	HBT5008C-5S	HBT8018C-5D
Max.delivery pressure(theoretical) Low pressure/High pressure	Mpa	6/8	10/18
Max.concrete output(theoretical) Low pressure/High pressure	m ³ /h	50	85/50
Rate power of motor	kW	55	186
Delivery cylinder Bore *Strok	mm	Φ 180 × 1400	Φ 200 × 1800
Hopper capacity * Feeding heigh	m ³ /mm	0.6 × 1240	0.7 × 1420
Dimension (L*W*H)	mm	5626 × 2045 × 2450	7161 × 2125 × 2628
Gross weight	kg	3950	7560
Max. aggregate size: Φ 150 mm delivery pipe	mm	50	50
Max. aggregate size: Φ 125 mm delivery pipe	mm	40	40
Type		S-valve	S-valve
Slump of concrete	mm	100 ■ 230	100 ■ 230

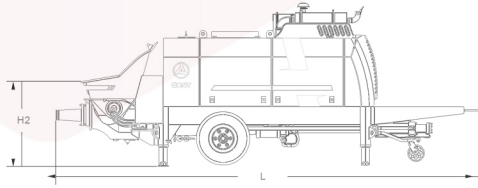

Berkat Jaya Beton